




PRESSURE WASHER
N V 3 5 0 0 P W G
Product No: A020020006
QUICK START GUIDE

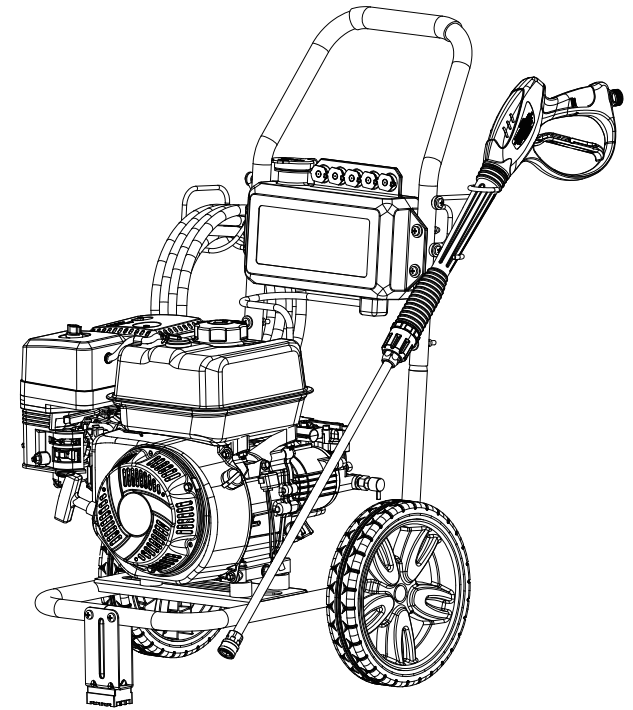


Jackson, Wisconsin
Website: www.novuspowerequipment.com
Email: Support@novuspowerequipment.com
Toll-Free Phone: 800-409-7802

2026 V01

2026 V01

UNPACKING

Carefully remove the Pressure Washer out from the carton/box and place the unit on the ground or other solid surface. Do not discard the packaging until you have confirmed the following items are present.

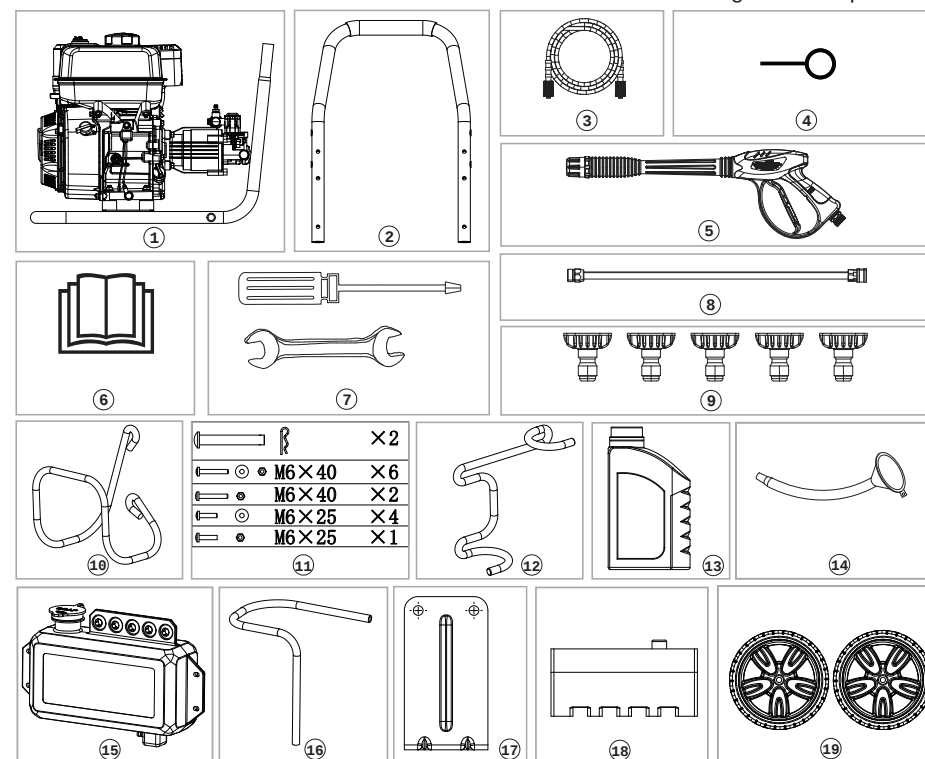

READ AND UNDERSTAND THE OPERATOR'S MANUAL AND ALL SAFETY WARNINGS BEFORE USE

Quick Start Guide Contents

- Unpacking / Package Contents
- Assembly Instructions
- Starting and Operating Procedures

If you require assistance during setup or operation of your new tiller, please contact our customer support team toll-free at (800) 409-7802 or email at support@novuspowerequipment.com


1	Main Unit	10	Wire Hanger - High Pressure Hose
2	Upper Handle	11	Hardware
3	High Pressure Hose	12	Holder - Spray Gun
4	Nozzle Cleaning Tool	13	Oil Bottle 20 fl oz (0.6L)
5	Spray Gun	14	Oil Funnel
6	Operators Manual & Quick Start Guide	15	Soap Tank Assy
7	Tools - Wrench 10/8mm, Screwdriver	16	Detergent Hose
8	Spray wand	17	Frame Support
9	Spray Nozzles (5 pcs) 0°, 15°, 25°, 40°, Soap	18	Foot Pad
		19	2 x Wheel

ASSEMBLY

Your Pressure Washer requires limited assembly prior to use. If you have any questions regarding the assembly of this product, call our Technical Support Team at 1-800-409-7802 M-F 8an-4pm CST or by email at support@novuspowerequipment.com Please have your model and serial number available at the time of the call.


Install the Wheels and Frame Support Assy

- Install the wheels (I) to the frame (G) with 2 x shafts (K) and 2 x hair pins (H).
- Install the footpad (B) to the frame support (D) with 1 x M6*25 bolt (A) and 1 x M6 nut (C) first, then assemble the frame support assy to the frame with 2 x M6*40 bolts (E) and 2 x M6 nuts (F).

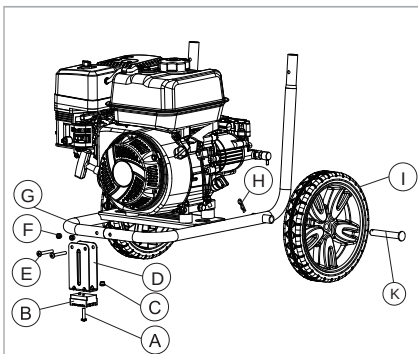

Install the Upper Handle


Align the two ends of the upper handle (A) with the two upright tubes of the frame (B), then press down firmly, tighten with 2 x M6*40 bolts (D) and 2 x washers (C) and 2 x M6 nuts (E).

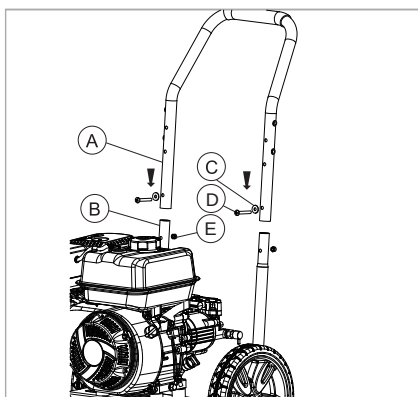

3

Install the Soap Tank Assy

Place the soap tank assy (A) at the front of the upper handle and secure with 4 x M6*40 bolts (C), 4 x washers (B) and 4 x M6 nuts (D).

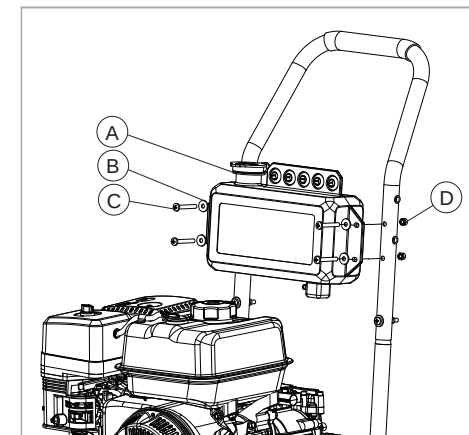


4

Install Nozzles


Press the spray nozzles into their corresponding color matched openings on the pressure washer's soap tank.

(A) Red = 0°, (B) Orange = 15°, (C) Green = 25°, (D) White = 40°, (E) Black = Soap

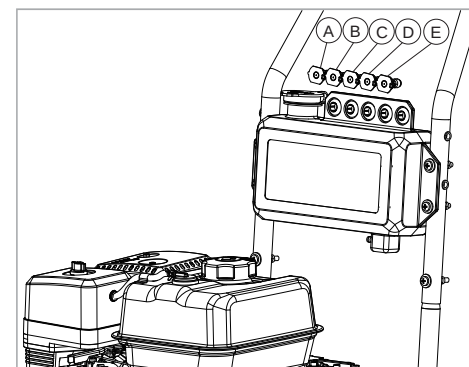

Install High Pressure Hose and Spray Gun Holder


Install the high-pressure hose holder (A) and spray gun holder (B) to the right and left side of the upper handle, then secure with 4 x M6*25 bolts (D) and 4 x washers (C).

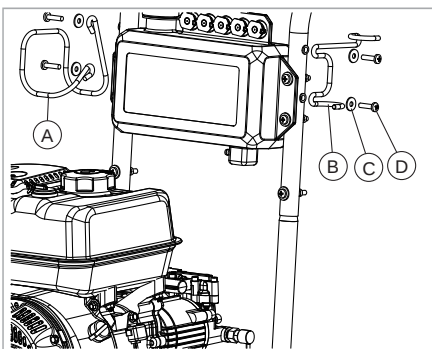


5

Assemble Spray Gun and High-Pressure Hose

a. Attach the spray wand onto the gun by rotating the coupler nut clockwise until hand tight. Do not overtighten.

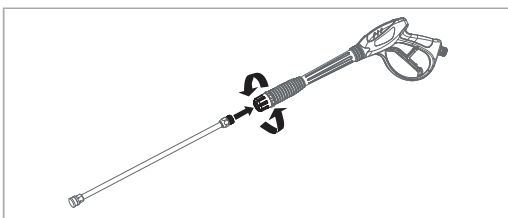


b. Connect one end of the high-pressure hose to the threaded joint of the spray gun by rotating the collar nut of the high-pressure hose clockwise until it is hand tight.

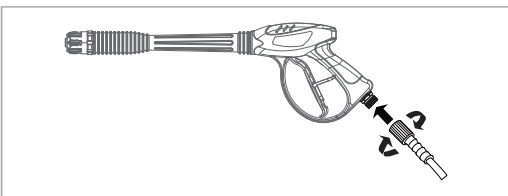

6


- c. Uncoil and straighten the high-pressure hose to prevent kinks.
- d. Connect the open end of the high-pressure hose to the outlet of the pump by rotating the collar nut clockwise until it is hand tight.

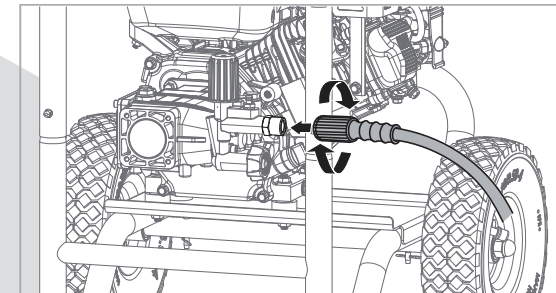

7


Connect the Garden Hose

- a. Run water through the garden hose for a few seconds to flush out debris from the hose.
- b. Inspect the pump's inlet strainer and remove any debris. Check for damage and if found replace.
- c. With the water turned off, connect the garden hose to the water inlet by turning the coupler counter clockwise and tighten by hand.

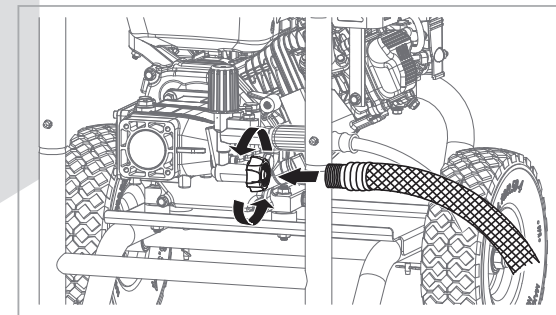

Add Engine Oil


1. Place the unit on a flat, level surface.

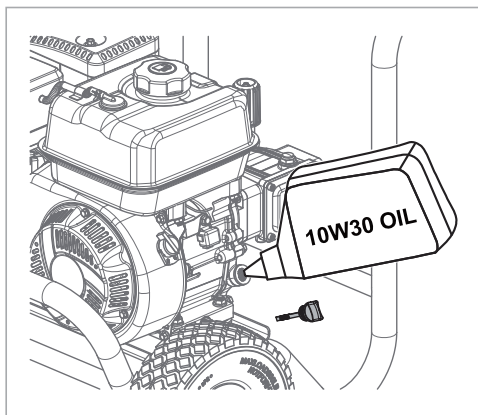

2. Remove the oil dipstick by turning counterclockwise.
3. Using a funnel, add up to 20.3 fl. oz. (0.6 L) of oil to the engine. The oil should be near the top thread of the filler neck.
4. Check the oil level using the dipstick. DO NOT screw in when checking.
5. When finished screw in the dipstick securely.

Add Fuel

1. Slowly add fresh, regular unleaded gasoline containing 10% or less ethanol to the tank until it reaches the Red fuel level indicator of the fuel screen. DO NOT overfill. A minimum of ¼ in. (6.4 mm) of space left in the tank is required for gasoline expansion.

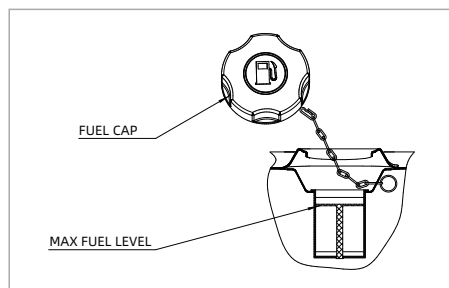


8

10

2. Replace and tighten the fuel tank cap.
3. Immediately wipe up any spills.

Connect Spray Nozzle

1. Engage the trigger safety lock on the spray gun.
2. Select a spray nozzle according to your cleaning needs.
3. Pull back on the spray wand quick connect collar and insert the desired spray tip and release the collar. Tug on the spray tip to ensure it is firmly secure.

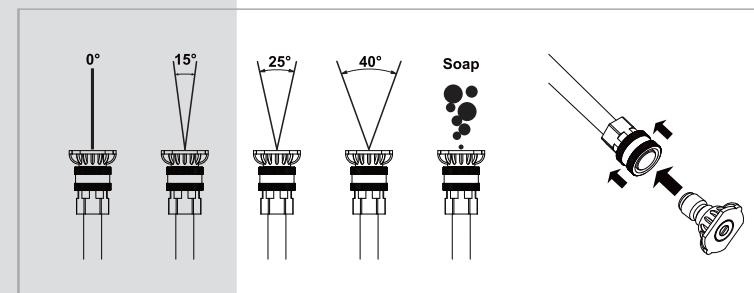

Congratulations, your machine is now ready to operate. Please read the entire operator's manual for full safety and operations guidelines.

Starting and Operating Procedures


This section of the quick start guide provides the basic instructions on how to start and operate your new water pump. This quick start guide is not a comprehensive guide, we recommend the operator's manual is read and understood before using your new equipment.

!!! IMPORTANT INFORMATION


Prior to attempting to start the engine the water supply must be connected to the pump and turned on.

STARTING THE ENGINE


1. Check oil level and add oil if necessary.
2. Make certain the unit is on a flat, level surface.
3. Move the Fuel Valve lever to the ON position (Fully Right).

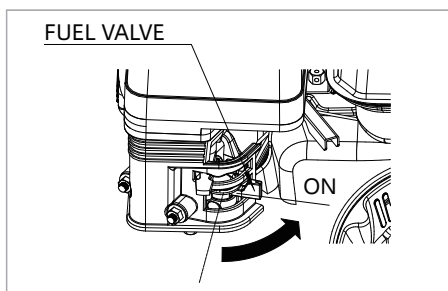


4. Slide the Choke Lever to the full CHOKE position (Fully Left).

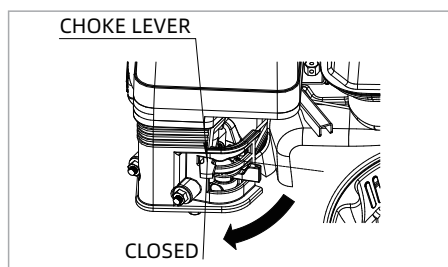


5. Turn the Engine ignition switch to the ON position.

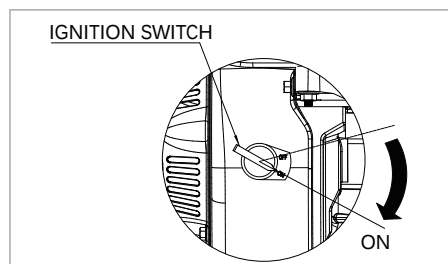

6. Pull the starter handle slowly until resistance is felt, then pull rapidly.
Note: Return the starter handle slowly back to the engine to prevent damage to the starter.

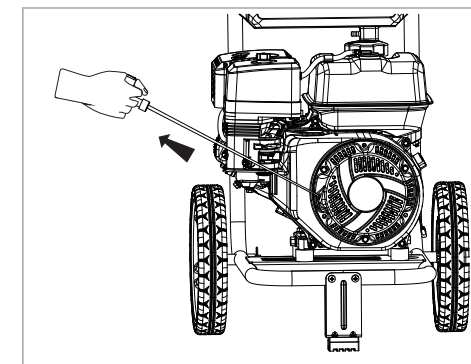


7. Once the engine starts, slowly slide the CHOKE lever to the OFF position. (Fully Right).

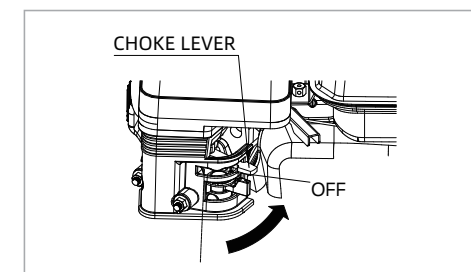


8. Once the engine starts, slowly slide the CHOKE lever to the OFF position. (Fully Right).

9. Once the engine starts, slowly slide the choke lever to the Right into the Off-choke position.

Pressure Washing Once the engine is started firmly grasp the spray gun with both hands. Point the spray gun in a safe direction, disengage the spray gun trigger lock by pressing down until it clicks into the back of the trigger.

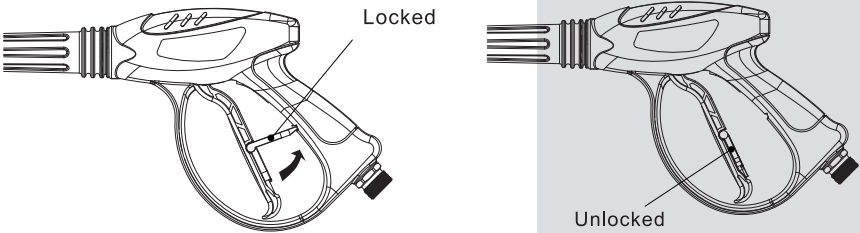

- a. Depress the spray gun trigger to begin spraying.
- b. Release the trigger to stop spraying.

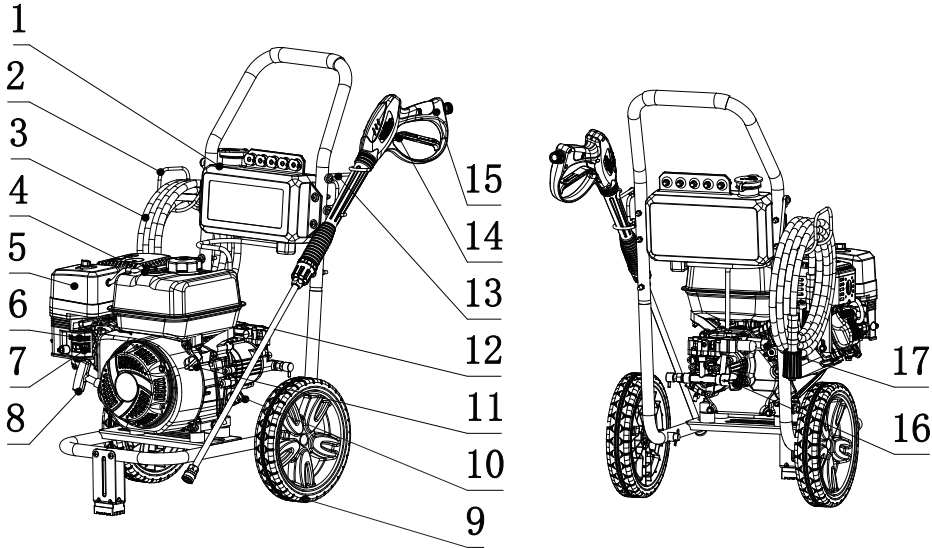

1	Soap Tank
2	Wire Hanger -High Pressure Hose
3	High Pressure Hose
4	Fuel Tank
5	Air Filter
6	Choke Lever
7	Fuel Valve Lever
8	Recoil Start Handle

9	Wheel
10	Oil Dipstick / Fill cap
11	Ignition ON / OFF Switch
12	Spray Wand
13	Spray Gun Holder
14	Spray Gun Trigger
15	Spray Gun
16	Garden Hose Inlet
17	High Pressure Hose Outlet